

# StreamLine® Low Profile Strobe Light

Models LP3P, LP3S, LP3T



## PERFECT SIZE MEETS SUPERIOR PERFORMANCE!

- Surface mount, T-mount, or integrated 1/2-inch pipe mount
- Five dome colors
- Screw-on lens
- Low profile — Model LP3S is only 5" high
- Available in 12-48VDC, 120VAC and 240VAC
- Type 4X, IP66 enclosure
- PLC and triac compatible
- UL and cUL Listed, CSA Certified, CE Approved\*
- Optional dome guard

Federal Signal introduces the Model LP3 low profile strobe light. This Type 4X strobe is available in five colors: amber, blue, clear, green and red. An optional dome wire guard is available for the LP3S and LP3T.

The LP3 is offered in three mounting configurations. LP3P features an integrated 1/2-inch NPT pipe mount. LP3S features a three-hole surface mount — ideal for control panels and other flat or flush surfaces. The “T-mount” LP3T has a popular 2-hole design for wall or flush mounting.

Both the LP3S and LP3T include a surface gasket to complete the Type 4X installation. An optional dome guard is available for use with the LP3S and LP3T. All LP3 units feature a threaded screw-on lens that provides tool-free wiring and strobe tube replacement. The strobe tube is rated for 7,000 hours.

The LP3 comes in three voltage variations: 12-48VDC, 120VAC and 240VAC. The state-of-the-art strobe mechanism produces 2.2 joules of energy, while drawing relatively low level amperage.

StreamLine® strobes feature high-quality, long-life strobe lamps which are designed to reduce tungsten build-up for longer lamp maintenance cycles. Careful consideration is given to the relationship between lamp shape and lens design for maximum light output. StreamLine products make use of surface mount technology, which provides a more powerful light in a much smaller package. The dry-electrolyte capacitor used in StreamLine products runs cooler than those used in many competitive strobes, resulting in a more reliable product that won't fail due to overheating.

Model	Voltage	Operating Current	Flash Rate/ Minute	Joule Output	Candlepower Peak <sup>1</sup>	ECP <sup>2</sup>
LP3	12-48VDC	0.44-0.10 amps	65-95	2.2	175,000	51.5
LP3	120VAC	0.10 amps	65-95	2.2	175,000	51.5
LP3	240VAC	0.07 amps	65-95	2.2	175,000	51.5


<sup>1</sup> Peak candlepower is the maximum light intensity generated by a flashing light during its light pulse

<sup>2</sup> ECP (Effective Candlepower) is the intensity that would appear to an observer if the light were burning steadily

\* P,S,M models only CE Approved



## STREAMLINE® LOW PROFILE STROBE LIGHT (LP3S, LP3P, LP3T)

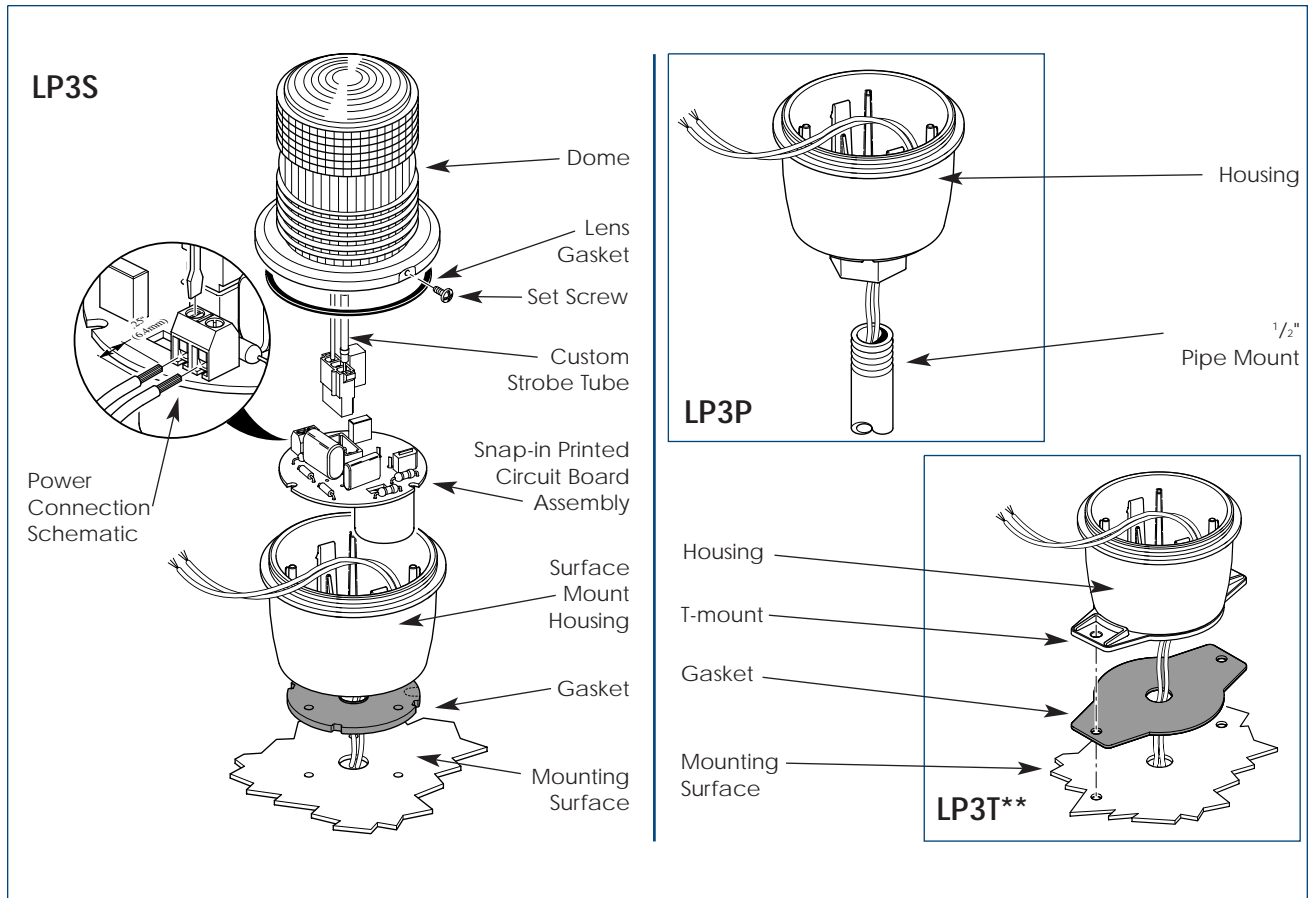

### SPECIFICATIONS

Lamp Life:*	7,000 hours	7,000 hours
Lamp Style:	Strobe	Strobe
Operating Temperature	-31°F to 150°F	-35°C to 66°C
Net Weight:	7.3 oz.	206.96 g
Shipping Weight:	8.5 oz.	240.98 g
Diameter:	3.125"	7.94 cm
Height (from bottom):		
LP3P	5.7"	14.48 cm
LP3S	5.0"	12.7 cm
LP3T	5.1"	12.95 cm

\*Optimal hours under ideal conditions.   \*\*LP3T-120 & 240VAC shown

### HOW TO ORDER

- Specify model, voltage and color
- Specify options  
Wire/Dome guard for LP3S, LP3T (LP3G)
- Please refer to Model Number Index LP3 (P,S,T) beginning on page 373

### REPLACEMENT PARTS

<u>Description</u>	<u>Part Number</u>	<u>Description</u>	<u>Part Number</u>
Dome, Amber	K8589063A	PC Assembly, 12-48VDC	K2001316B
Dome, Blue	K8589063A-01	PC Assembly, 120VAC	K2001317A
Dome, Clear	K8589063A-02	PC Assembly, 240VAC	K2001317A-01
Dome, Green	K8589063A-03	Gasket, Lens	K8589013A
Dome, Red	K8589063A-04	Gasket, LP3S	K8589011A
Strobe Tube	K149130A	Gasket, LP3T	K8589012A